

TP-Link Archer C20 AC750

Configuration Guide

FTTC/FTTP/HFC

Configuration Guide

TP-Link Archer C20

1. Connect your computer to the modem/router via a wired or wireless connection.
2. Launch a web browser and type in <http://tplinkwifi.net>.
3. The default username and password will be admin and admin.
4. Follow the step-by-step guide.


Note

This modem is compatible with the following technology types - FTTC/FTTP/HFC.



Step 1.

Enter the default **Username** and **Password (admin and admin)**.

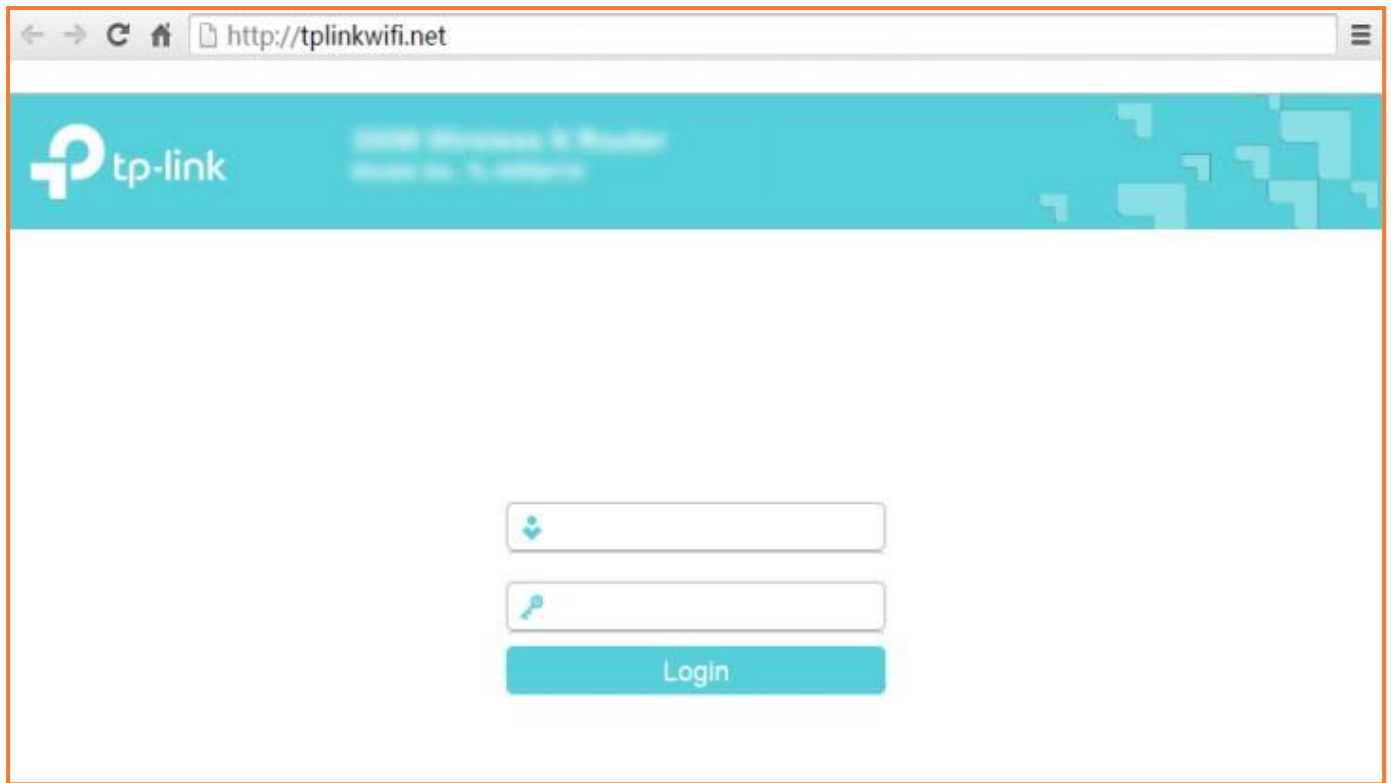


The screenshot shows a web browser window with the address bar displaying 'http://tplinkwifi.net'. The page has a teal header with the TP-Link logo and the text 'TP-Link Wireless & Router Model No. Archer C20'. Below the header, there is a login form consisting of two input fields: the top one has a user icon and the bottom one has a key icon. A teal 'Login' button is positioned below the password field.

Ensure your modem is on **Wireless Router**.


To set **Operation Mode**

Operation Mode > Wireless Router > Save.

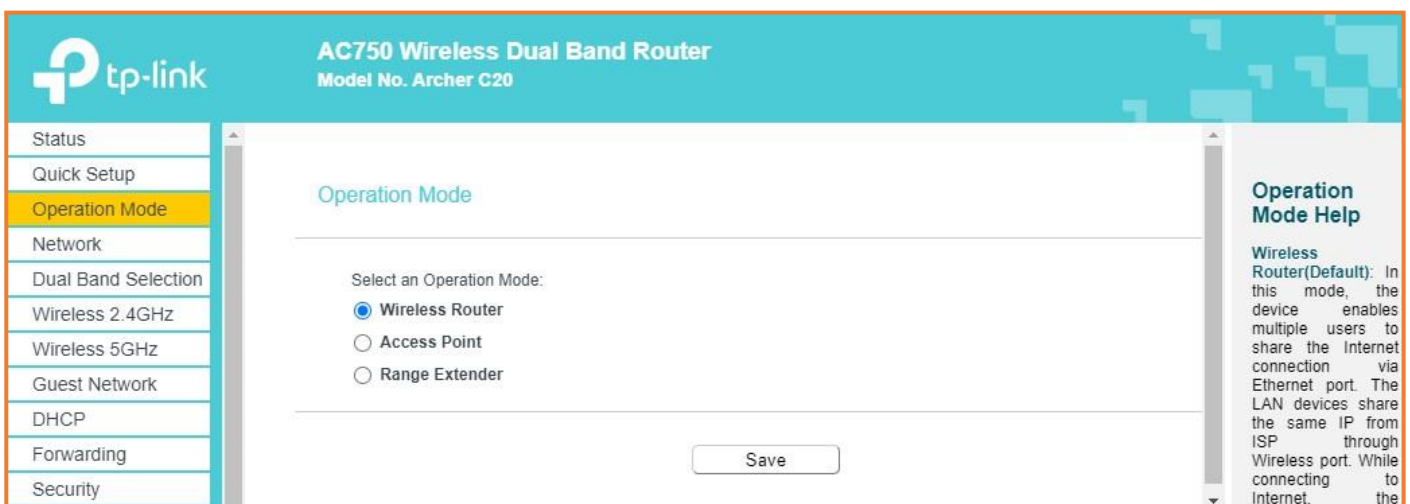

The screenshot shows the configuration page for a TP-Link AC750 Wireless Dual Band Router (Model No. Archer C20). The left sidebar contains a menu with 'Operation Mode' highlighted. The main content area is titled 'Operation Mode' and contains the text 'Select an Operation Mode:' followed by three radio button options: 'Wireless Router' (which is selected), 'Access Point', and 'Range Extender'. A 'Save' button is located at the bottom of the form. On the right side, there is an 'Operation Mode Help' section with text explaining the 'Wireless Router(Default)' mode.

Step 3.
Click on **Networks**.



AC750 Wireless Dual Band Router
 Model No. Archer C20

- Status
- Quick Setup
- Operation Mode
- Network
- WAN
- LAN
- IPTV
- MAC Clone
- Dual Band Selection
- Wireless 2.4GHz
- Wireless 5GHz
- Guest Network
- DHCP
- Forwarding
- Security
- Parental Controls
- Access Control
- Advanced Routing
- Bandwidth Control
- IP & MAC Binding
- Dynamic DNS
- IPv6
- System Tools
- Logout

WAN Settings

Connection Type: PPPoE Detect

PPP Username:

PPP Password:

Confirm password:

Secondary Connection: Disabled Dynamic IP Static IP (For Dual Access)

Connection Mode: Always on Connect on demand Connect manually

Max Idle Time: minutes (0 meaning connection remains active at all times)


Authentication Type: AUTO_AUTH

Connect
Disconnect

Advance

Save

Step 4.
Click on **WAN**.


AC750 Wireless Dual Band Router
Model No. Archer C20

Status
Quick Setup
Operation Mode
Network
- WAN
- LAN
- IPTV
- MAC Clone
Dual Band Selection
Wireless 2.4GHZ
Wireless 5GHZ
Guest Network
DHCP
Forwarding
Security
Parental Controls
Access Control
Advanced Routing
Bandwidth Control
IP & MAC Binding
Dynamic DNS
IPv6
System Tools
Logout

WAN Settings

Connection Type: PPPoE Detect

PPP Username:

PPP Password:

Confirm password:

Secondary Connection: Disabled Dynamic IP Static IP (For Dual Access)

Connection Mode: Always on
 Connect on demand
 Connect manually

Max Idle Time: minutes (0 meaning connection remains active at all times)

Authentication Type: AUTO_AUTH

Connect Disconnect


Advance ▾

Save

Step 5.

Enter the information provided by FibreMax®

Connection Type: **PPPoE**

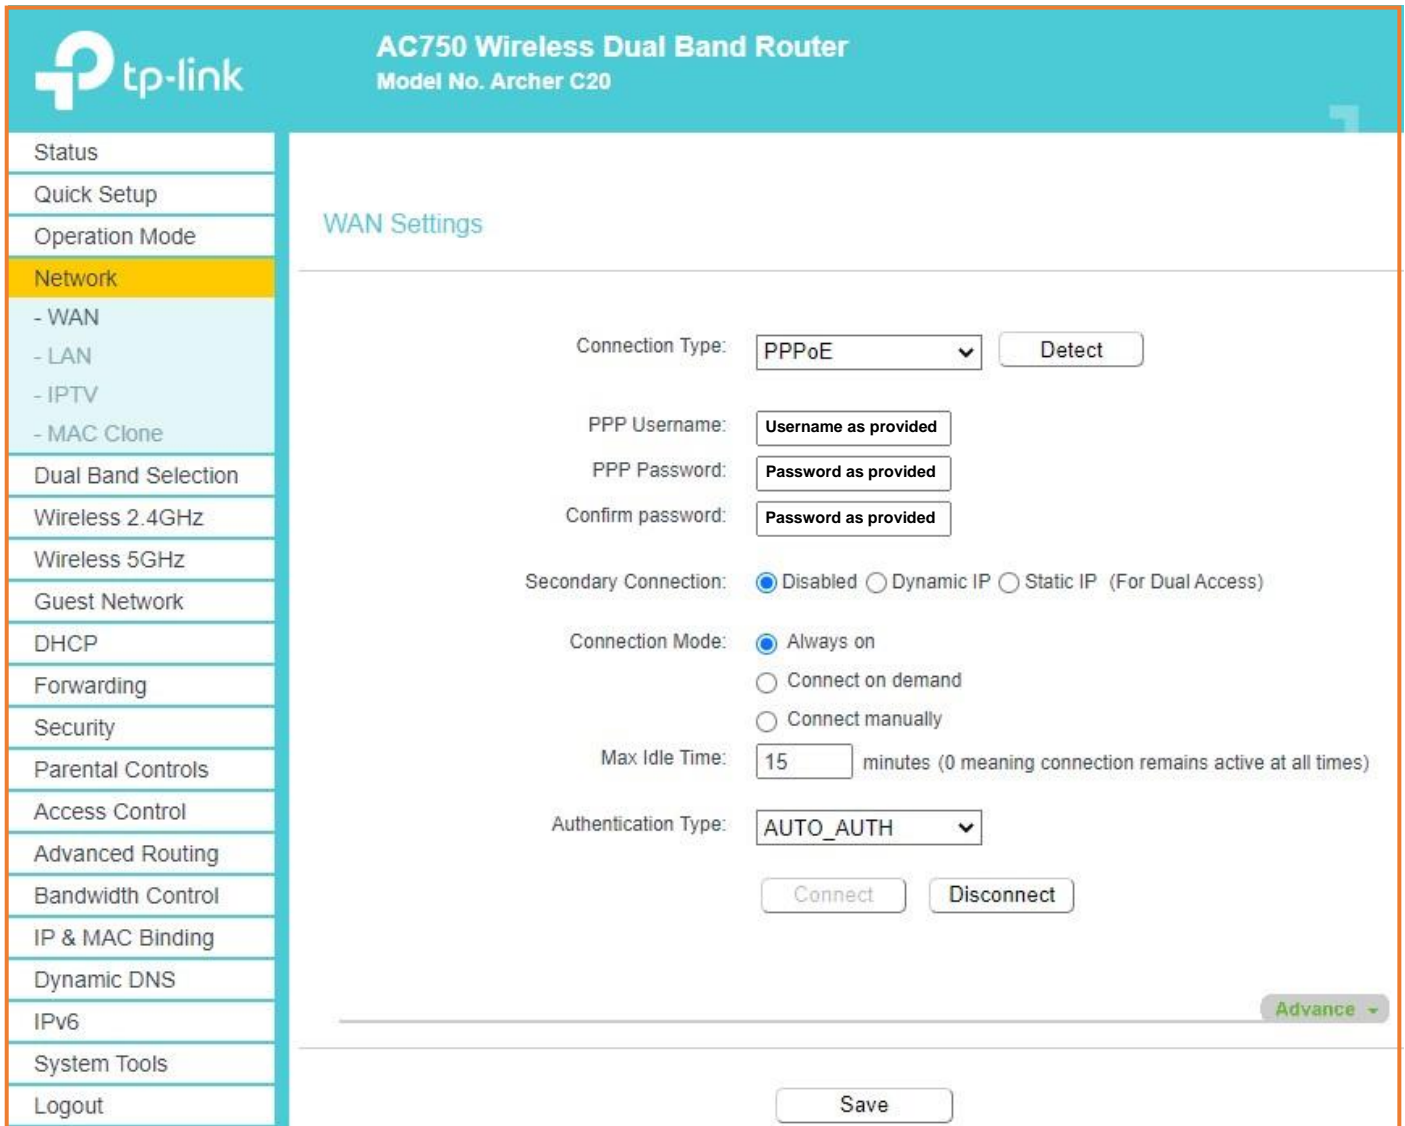

The screenshot shows the WAN Settings page for a TP-Link Archer C20 router. The left sidebar contains a navigation menu with options like Status, Quick Setup, Operation Mode, Network, Dual Band Selection, Wireless 2.4GHz, Wireless 5GHz, Guest Network, DHCP, Forwarding, Security, Parental Controls, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, IPv6, System Tools, and Logout. The main content area is titled 'WAN Settings' and contains the following configuration options:

- Connection Type: **PPPoE** (selected in a dropdown menu) with a 'Detect' button.
- PPP Username: **Username as provided** (text input field).
- PPP Password: **Password as provided** (text input field).
- Confirm password: **Password as provided** (text input field).
- Secondary Connection: Disabled Dynamic IP Static IP (For Dual Access).
- Connection Mode: Always on Connect on demand Connect manually.
- Max Idle Time: **15** minutes (0 meaning connection remains active at all times).
- Authentication Type: **AUTO_AUTH** (selected in a dropdown menu).

At the bottom of the settings area, there are 'Connect' and 'Disconnect' buttons. Below the settings area is an 'Advance' button with a dropdown arrow. At the very bottom of the page is a 'Save' button.

Click **Save**

Finish!