


D-Link N300 DSL-G255

Factory Rest

Factory Rest your Modem.

D-Link N300 DSL-G255

1. Ensure that the modem is on.
2. Press & Hold down the Reset button with a paperclip for 10-15 seconds and release.
3. Your D-Link router is now using the default settings for the network configuration.

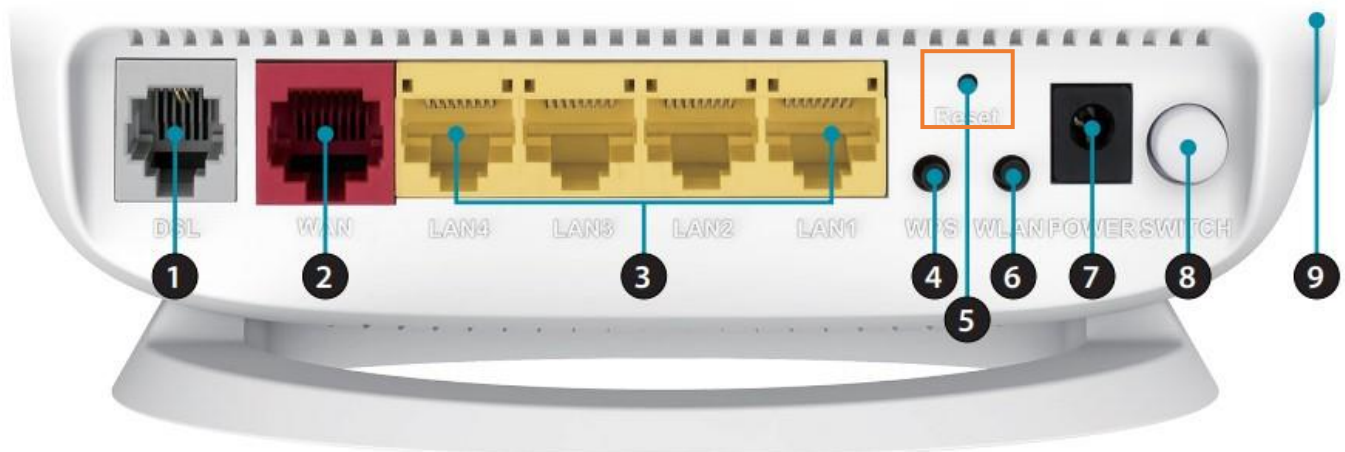

1	DSL Port	Connect to an DSL-enabled telephone line and with the supplied microfilter/splitter.
2	Wan Port	If using an external modem, connect your broadband modem to this port.
3	Lan Ports	Connect Ethernet devices such as computers, switches, storage (NAS) devices and game consoles.
4	WPS Button	Press to start the WPS process and automatically create a secure connection to a WPS client.
5	Reset Button	Insert a paperclip in the hole on the bottom of the device located the serial number sticker and wait for several seconds to reset the router to default settings.
6	Wireless On/Of	Press and hold this button for about 10 seconds to enable or disable the Wi-Fi network.
7	Power Connector	Connector for the supplied power adapter
8	Power Button	Press to power the router on or off.
9	USB Port	Connect a USB storage device to this port to share media to your network.