

TP-Link Archer VR1600 AC1600

Configuration Guide.

FTTC/FTTP/HFC


Configuration Guide.

TP-Link Archer VR1600 AC1600


1. Connect your computer to the router via a wired or wireless connection.
2. Launch a web browser and type in <http://tplinkmodem.net> or 192.168.1.1
3. The default username and password will be admin and admin.
4. Follow the step-by-step instructions to set up an internet connection.



Step 1.
Enter The default **Username** and **Password (admin and admin)**.

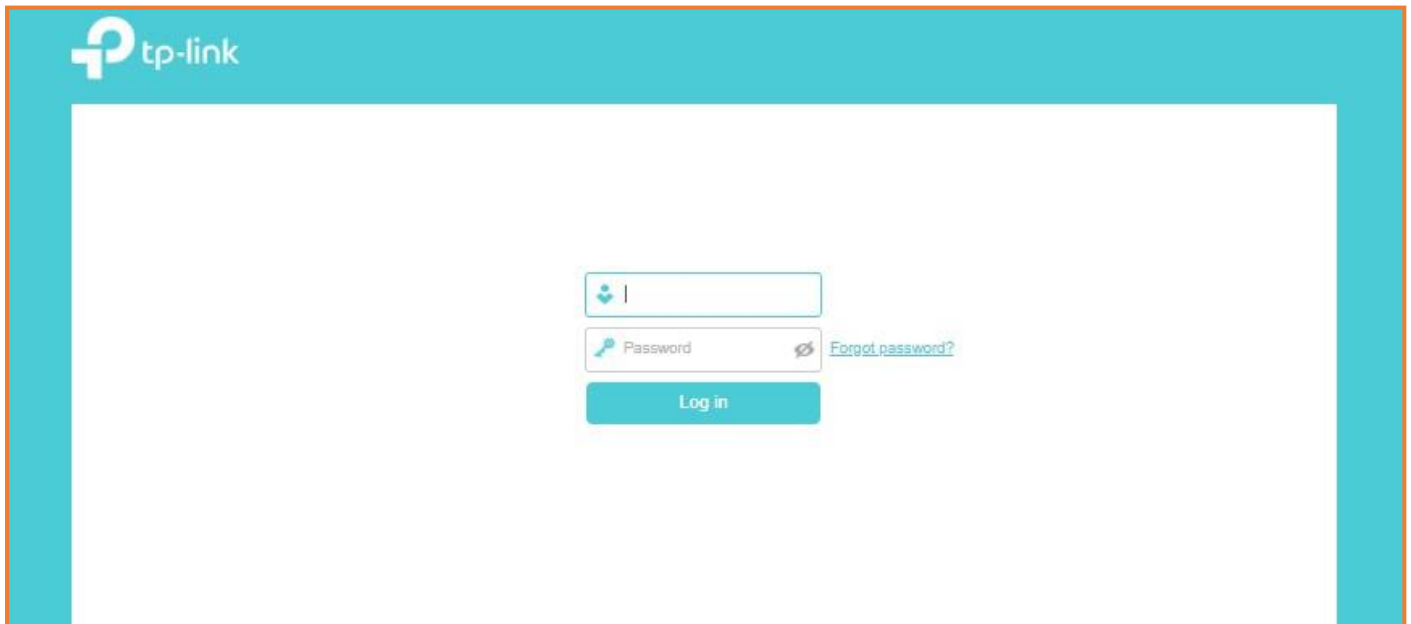


Step 2.
Click on **Advanced**.

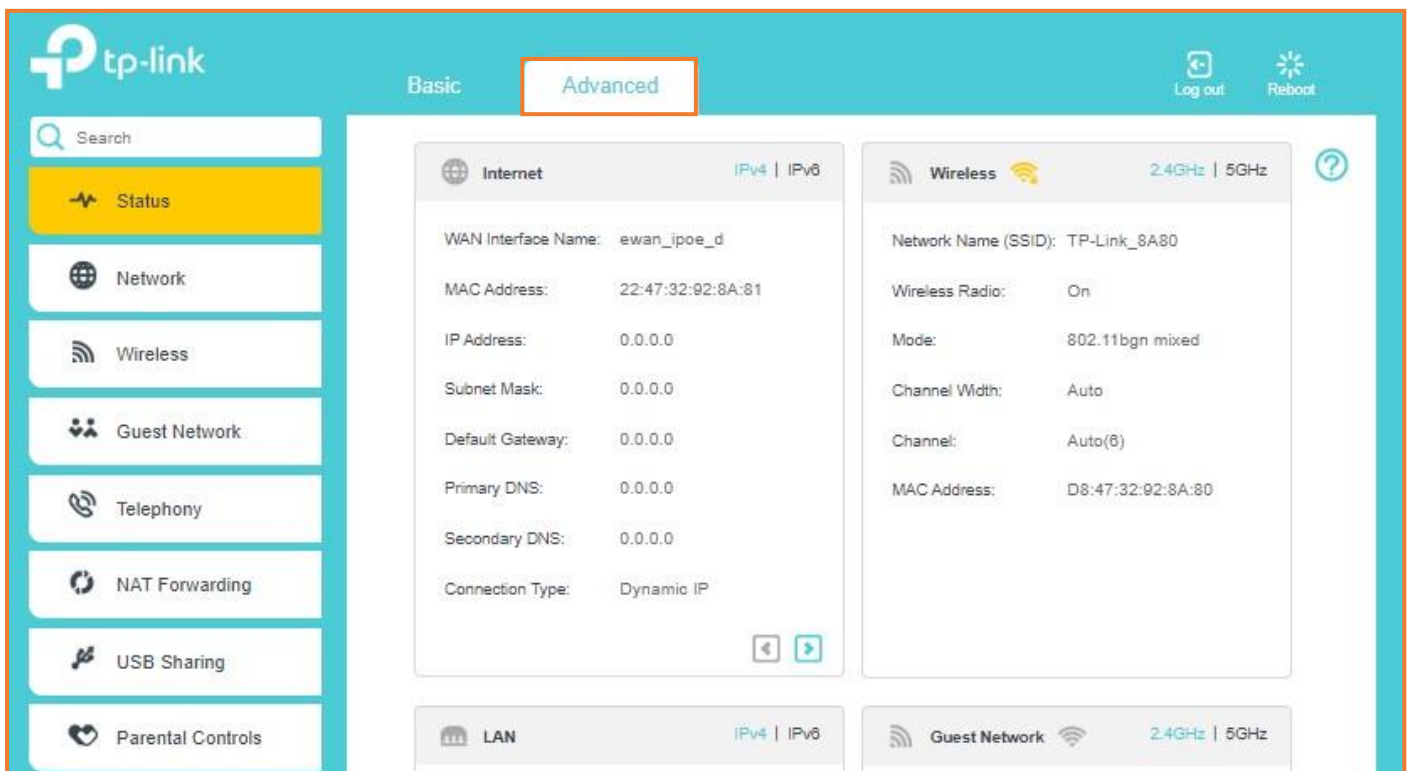


Step 3.
Click on **Networks** > Click on **DSL** > Click on **Delete All**.

Note

(This is to ensure there are no conflicting connections)

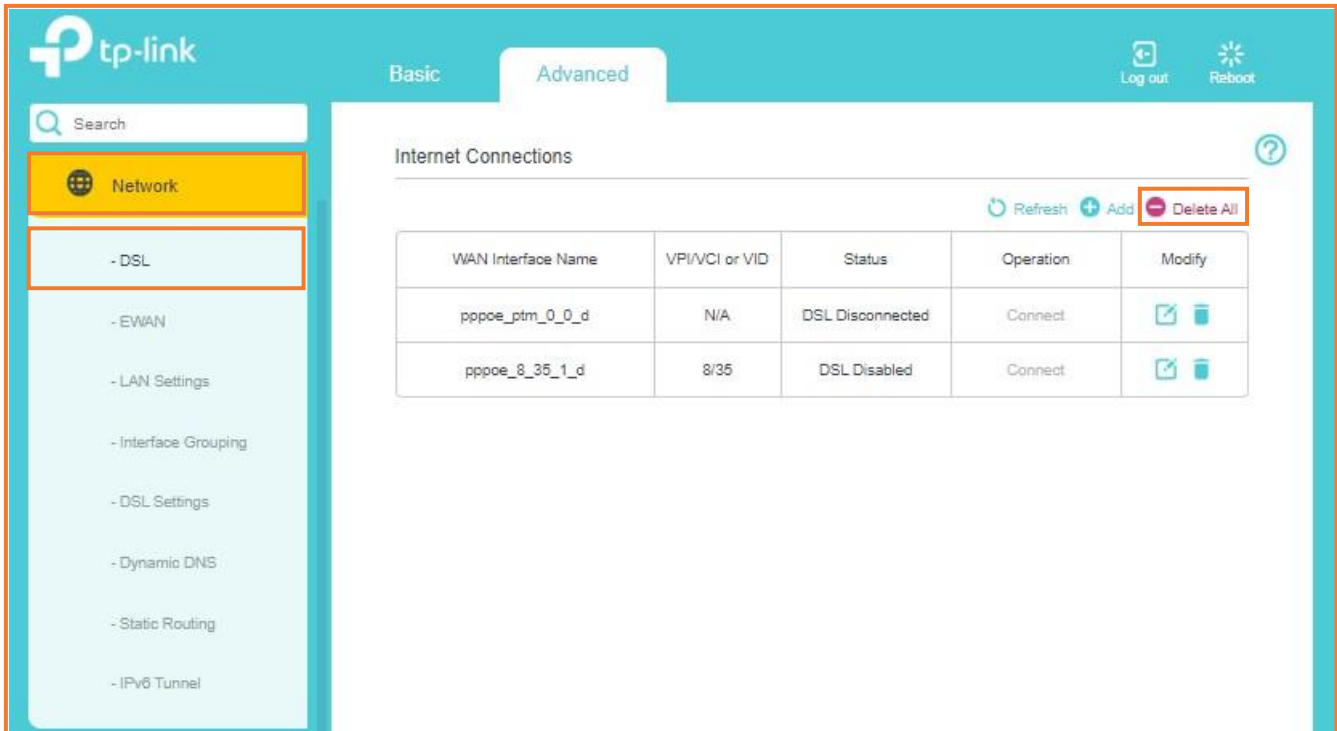

Step 4.
Click on **EWAN**.

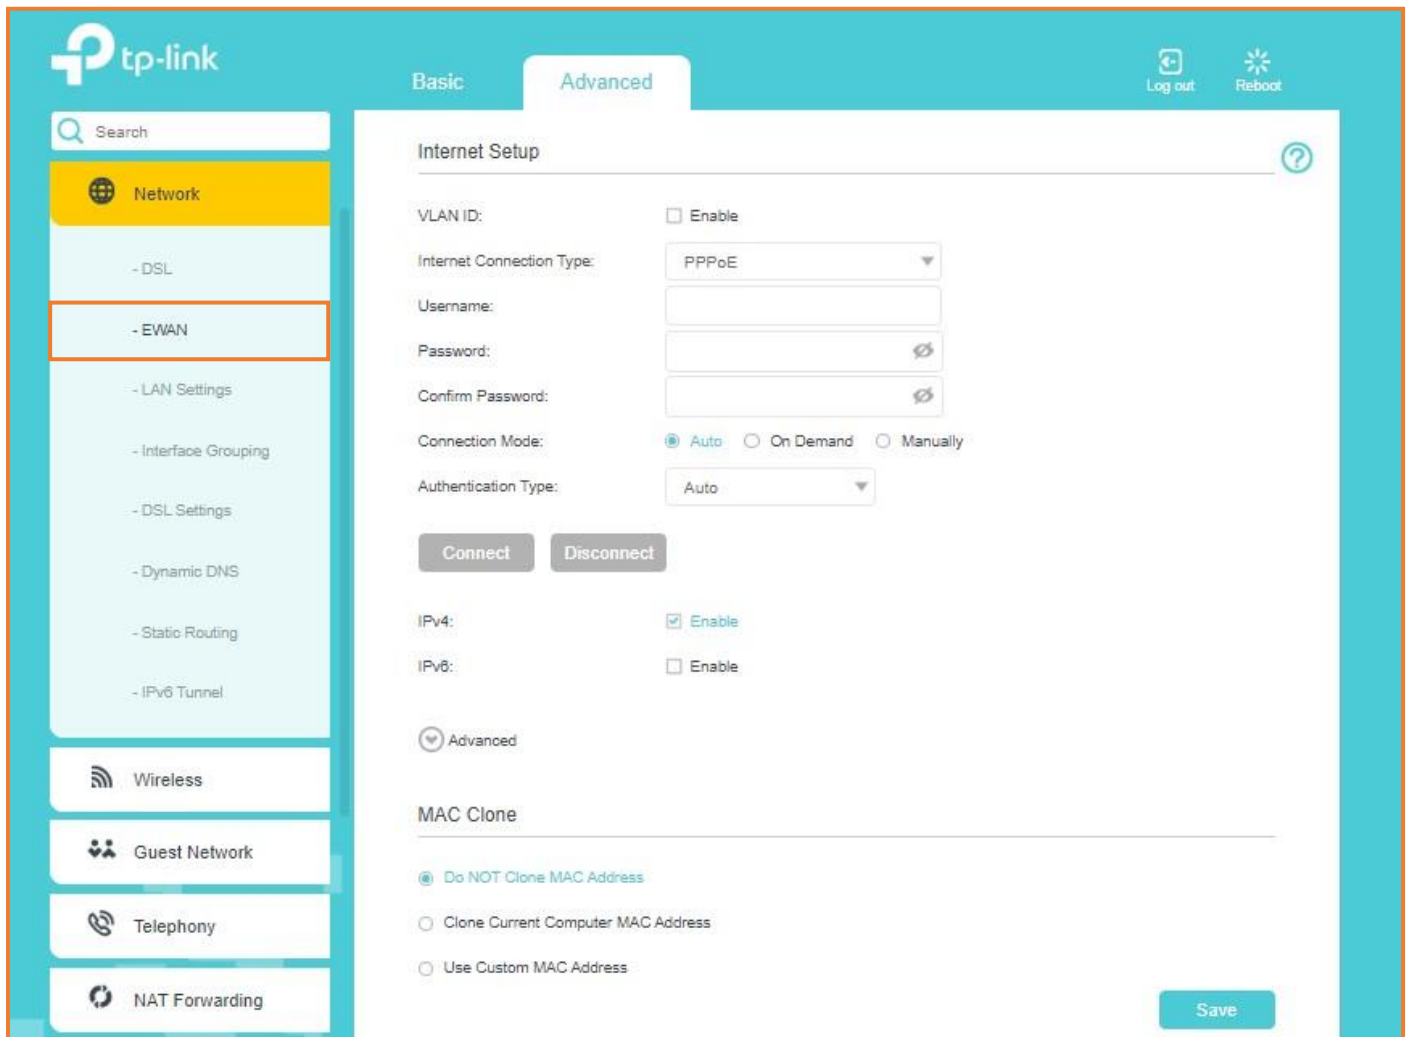


The screenshot shows the TP-Link web interface with the 'Advanced' tab selected. The left sidebar has 'Network' expanded, and 'EWAN' is highlighted with an orange border. The main content area is titled 'Internet Setup' and contains the following configuration options:

- VLAN ID: Enable
- Internet Connection Type: PPPoE (dropdown)
- Username: (text input)
- Password: (password input)
- Confirm Password: (password input)
- Connection Mode: Auto, On Demand, Manually
- Authentication Type: Auto (dropdown)
- Buttons: Connect, Disconnect
- IPv4: Enable
- IPv6: Enable
- Advanced: (collapse icon)
- MAC Clone:
 - Do NOT Clone MAC Address
 - Clone Current Computer MAC Address
 - Use Custom MAC Address
- Save button

Continue to the **next page**.

Step 5.
Enter the information provided by FibreMax®.

Internet Connection Type: **PPPoE**

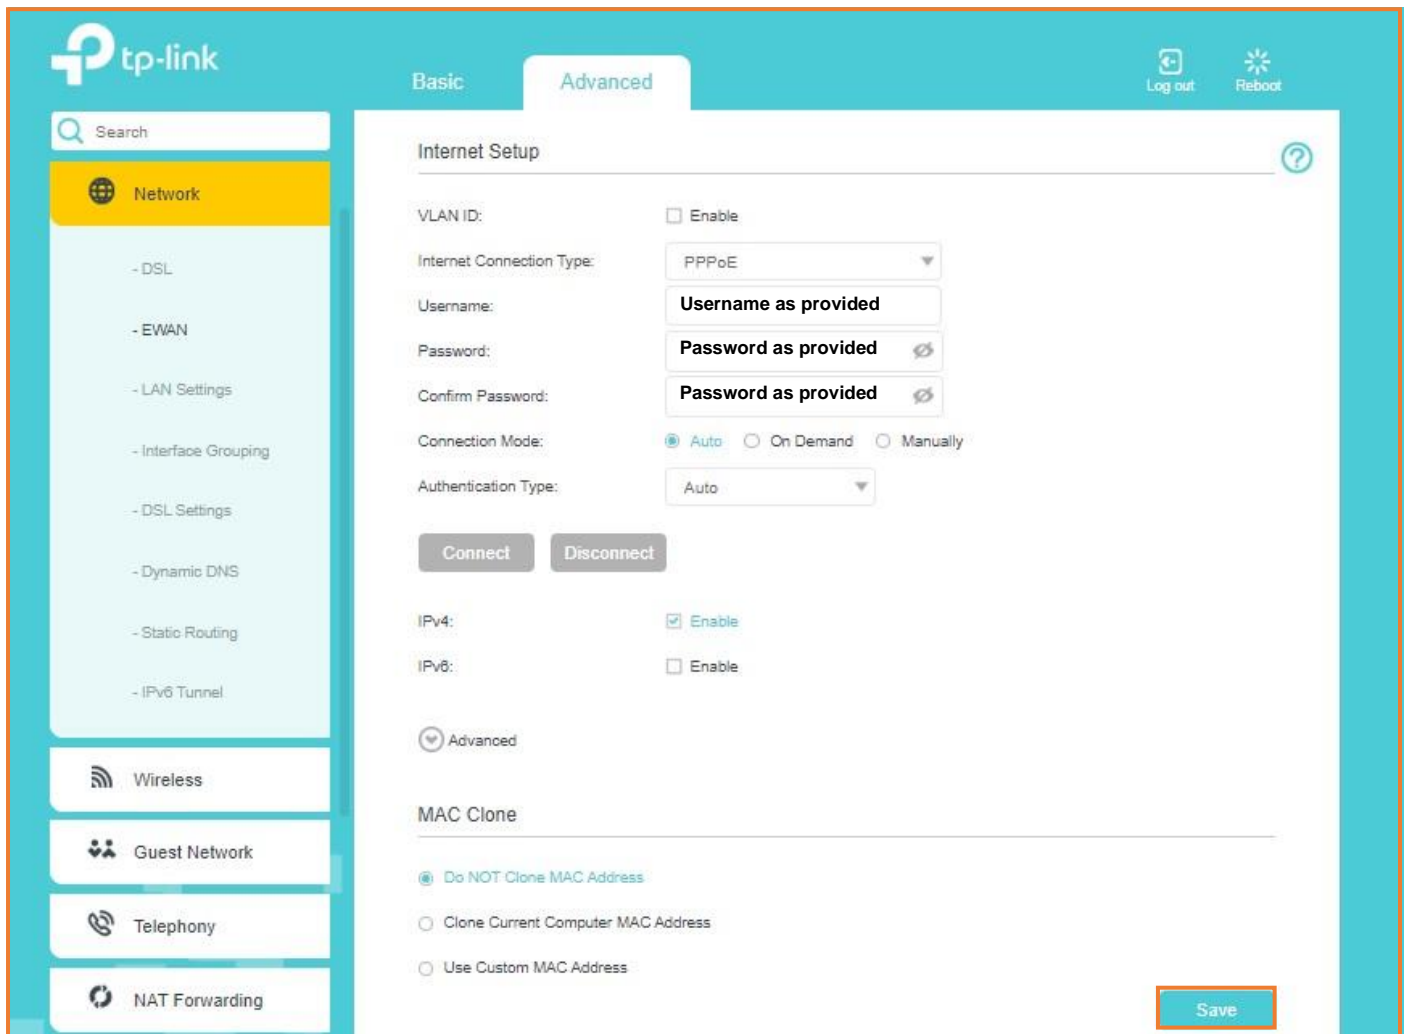

The screenshot shows the TP-Link router's web interface. The left sidebar contains navigation options: Network, Wireless, Guest Network, Telephony, and NAT Forwarding. The main content area is titled 'Internet Setup' and is divided into 'Basic' and 'Advanced' tabs. The 'Advanced' tab is active. The settings are as follows:

- VLAN ID: Enable
- Internet Connection Type: PPPoE
- Username: Username as provided
- Password: Password as provided
- Confirm Password: Password as provided
- Connection Mode: Auto, On Demand, Manually
- Authentication Type: Auto
- Buttons: Connect, Disconnect
- IPv4: Enable
- IPv6: Enable
- Advanced section: Do NOT Clone MAC Address, Clone Current Computer MAC Address, Use Custom MAC Address
- MAC Cloning section: Do NOT Clone MAC Address, Clone Current Computer MAC Address, Use Custom MAC Address
- Buttons: Save

Click **Save**.

Finish!